



## combinette | combi S | combi comfort | combi E

Desktop plastic comb punching and binding machines. For all types of comb book production. Designed to produce documents of all sizes in low, medium and high volumes quickly and easily.



PREMIUM QUALITY WORLDWIDE  
MADE IN GERMANY

Illustrated: combi E

### Customer benefits:

- Binds up to 480 sheets
- Closure control guarantees easy comb closure
- Gauge to alter margin for a stronger bind<sup>(2)</sup>
- Special hardened punch pins for long lasting life
- Staggered punching pins for better punching
- QSA (Quick Size Adjustment)<sup>(2)</sup> for high flexibility of different paper formats: A5 and A4
- Adjustable side lay for perfect punching registration
- Easy to empty sliding waste tray
- Measures the document or comb size
- Heavy duty construction & compact design

### Maximum:

- Width **340 mm**
- Punch up to<sup>(1)</sup> **2.5 mm**
- Bind up to **48 mm**

### Output:

- Max. punched sheets per hour<sup>(1)</sup> **17,000**
- Max. bound products per hour<sup>(1)</sup> **250**



#### combinette

Entry-level office manual punching and binding machine designed for regular use in a small to medium sized office.



#### combi S

Manual punching and binding machine designed for regular use in a small to medium sized office.



#### combi comfort

Electric punching and manual binding machine designed for regular use in a small to medium sized office. It takes the manual labour out of punching.



#### combi E

Electric heavy-duty and high-speed punching and manual binding machine. Designed for the production of high volumes of documents of all sizes quickly and easily.



All performance outputs are based on 80 gsm paper and may vary depending on the product type, the working environment and the operator. For best punching results we recommend a paper thickness of 1.5 - 2.0 mm.

<sup>(1)</sup> Dependent on machine type.  
<sup>(2)</sup> Not available for combinette.



Vertical punching makes it simple and easy to punch correctly every time on both the manual and electric versions of the combi range.



QSA (Quick Size Adjustment) technology allows the punching pins to be cancelled and the paper formats to be changed quickly and easily.<sup>(1)</sup>




The depth gauge feature allows the operator to adjust the punched hole margin from 2 mm to 4,5 mm<sup>(1)</sup>. This adds strength to the bound edge.



It binds volumes up to 480 sheets.

The closure control guarantees quick and easy comb opening and closure.

### US-pitch

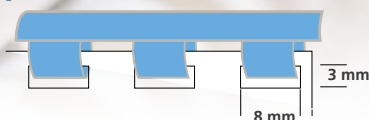

21 rings in A4  
14 rings in A5

Technical data:	combinette	combi S	combi comfort	combi E
Punching capacity - sheets per hr:	12,000	12,000	14,000	17,000
Min. punching width:	10 mm	10 mm	10 mm	10 mm
Max. punching width:	300 mm	340 mm	340 mm	340 mm
Min. unpunched length:	50 mm	50 mm	50 mm	50 mm
Max. unpunched length:	500 mm	500 mm	500 mm	500 mm
Max. punching thickness:	2.5 mm	2.5 mm	2 mm	2.5 mm
Punching operation:	Manual	Manual	Electric	Electric
Punch pattern:	Oblong 8 x 3 mm	Oblong 8 x 3 mm	Oblong 8 x 3 mm	Oblong 8 x 3 mm
Pitch:	US	US	US	US
Selectable punch pins (QSA):	No	Yes	Yes	Yes
Variable margin depth:	No	Yes	Yes	Yes
Binding thickness:	1 - 48 mm	1 - 48 mm	1 - 48 mm	1 - 48 mm
Binding element Ø:	6 - 52 mm	6 - 52 mm	6 - 52 mm	6 - 52 mm
Min. binding width:	10 mm	10 mm	10 mm	10 mm
Max. binding width:	340 mm	340 mm	340 mm	340 mm
Binding operation:	Manual	Manual	Manual	Manual
No. of books output per hour:	200	200	220	250
Machine dimensions L x W x H:	360 x 490 x 90 mm	360 x 490 x 90 mm	360 x 500 x 350 mm	490 x 500 x 250 mm
Machine weight:	9.5 kg	10 kg	21.5 kg	36 kg
Machine packaging dimensions L x W x H:	600 x 480 x 280 mm	600 x 480 x 280 mm	600 x 600 x 340 mm	630 x 600 x 340 mm
Machine weight with packaging:	11.8 kg	11.9 kg	24 kg	40.5 kg
Power requirement:	-	-	230/250V/50Hz/90W 115/200V/60Hz/90W	230/250V/50Hz/250W 115/200V/60Hz/250W

Technical modifications may be made without notice.

1 mm = 10 sheets of paper, based on 80 gsm.

All performance outputs are based on 80 gsm paper and may vary depending on the product type, the working environment and the operator. For best punching results we recommend a paper thickness of 1.5 - 2.0 mm.

<sup>(1)</sup> Not available for combinette.

For further information and videos please visit: